


# POBCO® Roller Specifications

Quantity: \_\_\_\_\_ Part No.: \_\_\_\_\_ Date: \_\_\_\_\_  
 (Given when ordered)

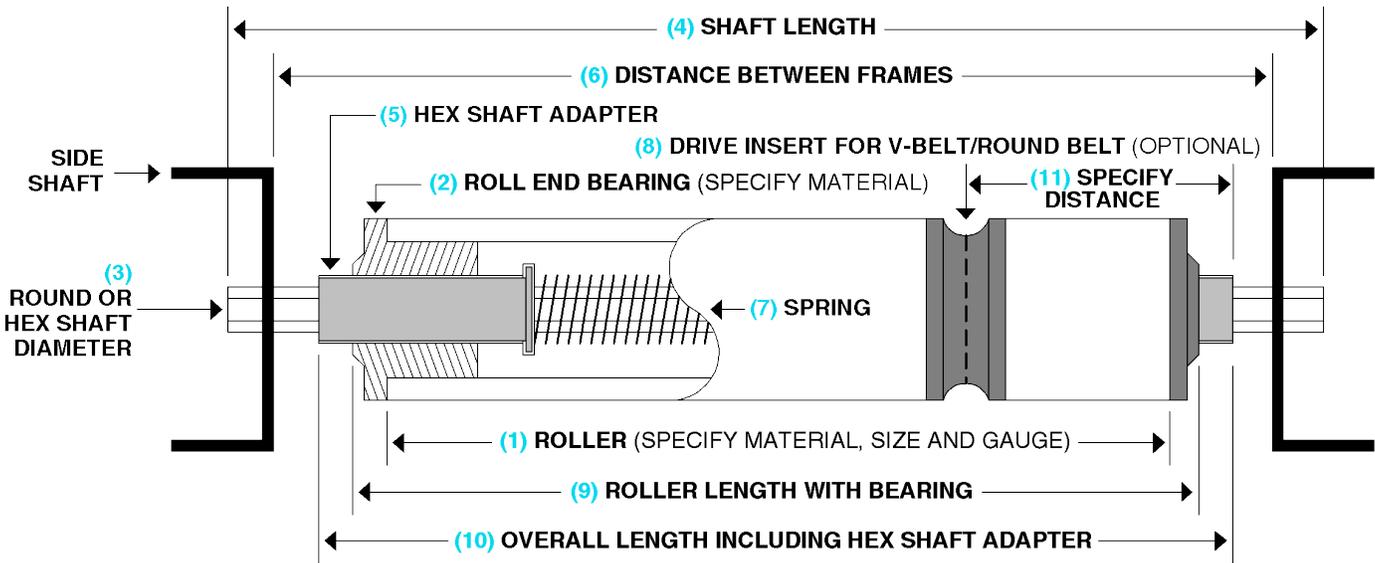

**NOTE: PLASTIC ROLLERS ARE MORE FLEXIBLE AND CARRY LESS LOAD THAN METAL ROLLERS. IF RIGIDITY IS IMPORTANT: PLEASE CONSULT US ABOUT SPECIAL INSTRUCTIONS.**

Customer: \_\_\_\_\_ Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Shipping Address: \_\_\_\_\_

Distributor: ( ) OEM: ( ) USER: ( ) Please check one

(1) Tube/Pipe Material: \_\_\_\_\_ Tube/Pipe O.D.: \_\_\_\_\_ Indicate size and gauge

(2) Roller End Bearing Material Type: \_\_\_\_\_ Shaft Included: Yes: ( ) No: ( )

(3) Shaft Diameter: \_\_\_\_\_ Indicate Round or Hex: \_\_\_\_\_ Shaft Material: \_\_\_\_\_

(4) Shaft Length: \_\_\_\_\_ (5) Hex Shaft Adapter: Yes: ( ) No: ( )

(6) Distance Between Frames: \_\_\_\_\_ (7) Spring Loaded: Yes: ( ) No: ( )

(8) Drive Roller: Yes: ( ) No: ( ) (11) Specify V-Belt or Round Belt Size & Distance: \_\_\_\_\_  
 \_\_\_\_\_ (see drawing)

Load: lbs/Roller: \_\_\_\_\_ Speed: fpm/Roller: \_\_\_\_\_

Special Roller Concerns: (Temp., Chemicals, Wet or Dry, etc.) \_\_\_\_\_

**FOR PRODUCTION USE:**

(9) Roller Length with Bearings: \_\_\_\_\_ (10) Overall Length Including Hex Shaft Adapter: \_\_\_\_\_

(2) Roll End Bearing Part No. \_\_\_\_\_ (5) Hex Shaft Adapter Part No.: \_\_\_\_\_

(1) Tubing/Pipe Length: \_\_\_\_\_

POBCO assumes a total of 1/4" clearance total between frames dimension (1/8" on both sides) as well as 1-3/4" additional shaft length (7/8" on both sides) beyond distance between frames, unless otherwise stated by customer. POBCO can also furnish the complete roller per your specifications or can supply the components (per drawing) for your own assembly. A popular roller size is the 1-1/2" Schedule 40 PVC (1.900" O.D.) Pipe/Spring Loaded which comes with a variety of Bearing materials including Plastic, Plastic/Stainless Steel Ball Bearings and Lubricant-Filled Hardwood.

Tel. - (508) 791-6376

Fax - (508) 791-3247

E-Mail - pobco@pobcoplastics.com